


UP 15-10 B5/B7

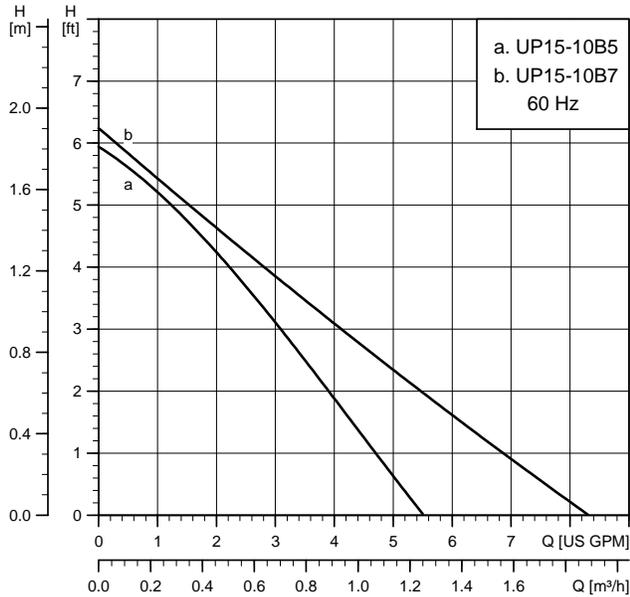

TM03 8424 4412

| | |
|--------------------------|-------------------------------------|
| Flow range: | 0-8.2 gpm (0-1.9 m ³ /h) |
| Head range: | 0-6.2 ft (0-1.9 m) |
| Motors: | 2-pole, single-phase |
| Max. liquid temperature: | 220 °F (104 °C) |
| Min. liquid temperature: | 36 °F (2 °C) |
| Max. system pressure: | 145 psi (10 bar) |



Note: If the UP pump is equipped with a timer, the maximum liquid temperature is 150 °F (66 °C).

| Model | Volts | Amps | Watts | Hp | Capacitor |
|--------------------|-------|------|-------|------|-----------|
| UP 15-10 B5 and B7 | 115 | 0.22 | 25 | 1/25 | 2μF/400 V |

Approvals





UP 15-10 B5 and UP 15-10 B5/LC





TM03 8545 1907

UP 15-10 B7 and UP 15-10 B7/LC





TM03 8547 1907

UP 15-10 B5/TLC



TM03 8546 1907

UP 15-10 B7/TLC



TM03 8548 1907

| Model type | Product number 115 V | Dimensions [inches (mm)] | | | | | | Connection type and size | Shipping weight [lbs (kg)] |
|-----------------|-------------------------|--------------------------|------------|------------|------------|-----------|------------|--------------------------|----------------------------|
| | | A | B | C | D | E | F | | |
| UP 15-10 B5 | 59896213 | 5.00 (127) | 4.69 (119) | 4.00 (102) | 4.00 (102) | 3.50 (89) | — | 1/2" sweat | 6.0 (2.7) |
| UP 15-10 B5/LC | 59896214 | 5.00 (127) | 6.20 (157) | 5.50 (140) | 4.00 (102) | 3.50 (89) | 4.00 (102) | 1/2" sweat | 6.5 (2.9) |
| UP 15-10 B5/TLC | 59896215 | 5.00 (127) | 6.19 (157) | 5.50 (140) | 4.00 (102) | 3.50 (89) | 4.00 (102) | 1/2" sweat | 6.5 (2.9) |
| UP 15-10 B7 | 59896226 | 6.38 (162) | 5.13 (130) | 4.00 (102) | 3.81 (97) | 3.25 (83) | — | 3/4" sweat | 6.7 (3.0) |
| UP 15-10 B7/LC | 59896209 | 6.38 (162) | 6.63 (168) | 5.50 (140) | 3.81 (97) | 3.25 (83) | 4.00 (102) | 3/4" sweat | 7.5 (3.4) |
| UP 15-10 B7/TLC | 59896210 | 6.38 (162) | 6.63 (168) | 5.50 (140) | 3.81 (97) | 3.25 (83) | 4.00 (102) | 3/4" sweat | 7.5 (3.4) |

Note: LC/TLC models have a 6 ft (1.8 m), 3-prong power cord.
Dimensions in inches unless otherwise noted.